

High Resolution IR Dome Camera

Features


- 1/3" SONY Super HAD CCD
- 550 TVL Resolution
- 3.8~9.5mm Varifocal Lens
- 0.00 Lux Minimum Illumination
- Auto White Balance
- Built-in IR LED and Sensor



Specifications

Model	CV-DC550IRVF
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency(H)	15.734kHz
Scanning Frequency(V)	59.94Hz
Image Sensor	1/3" SONY HAD CCD
Sync. System	Internal
Total Pixels Number	811(H) x 508(V) 410K
Effective Pixels Number	768(H) x 494(V) 380K
Horizontal Resolution	550 TV Lines
Video Output Level	1.0Vp-p (75 Ohm, composite)
S/N Ratio	50dB Min. (AGC off)
Digital Zoom Ratio	2x (ON/OFF)
Lens	DC Iris Vari-focal Lens (3.8 ~ 9.5mm)
Min. Illumination	0.3lx (Color), 0.1lx (B/W), 0.008lx(DSSx32, Color)
Digital Noise Reduction	Auto
White Balance	Auto
AGC	ON/OFF
BLC	ON/OFF
Flickerless	ON/OFF
IR LED & Sensor	850nm / 30° IR LED 24EA, Sensor 1 EA
IR LED Lighting Distance	Max. 20m
Electronic Shutter Speed	1/60~1/100,000sec
Supplied Voltage	24VAC / 12VDC Dual Voltage
Power Consumption	6W / 24VAC (20V~28V) or 12VDC
Weight	360g

Dimensions

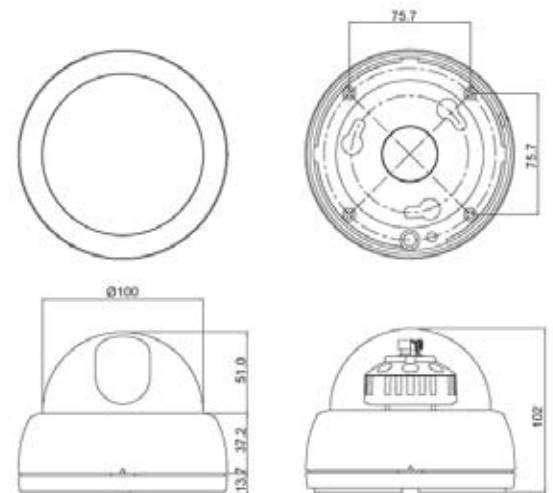

ClearVision and the ClearVision Logo are registered trademarks of ClearVision, Inc.
 Sony is a registered trademark of Sony Corporation
 Product specifications and availability are subject to change without notice.
 ©Copyright 2008, ClearVision, Inc. All rights reserved.