

IR Dome Camera

Features


- 1/3" SONY Super HAD CCD
- 380 TVL Resolution
- 3.8mm Lens
- 0 Lux Minimum Illumination
- 12VDC Operation



Specifications

Model	CV-DC380IR
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency(H)	15.734kHz
Scanning Frequency(V)	59.94Hz
Image Sensor	1/3" SONY Super HAD CCD
Sync. System	Internal
Total Pixels Number	537(H) x 505(V) 270K
Effective Pixels Number	510(H) x 492(V) 250K
Horizontal Resolution	380 TV Lines
Video Output Level	1.0Vp-p (75 Ohms, composite)
Lens	Fixed Lens (3.8mm)
Min. Illumination	0.00Lux (IR LED on)
White Balance	Auto
DIP SW	AGC On/Off, BLC On/Off, Flickerless On/Off
Focus Mode	Manual
IR LED & Sensor	850nm / 30° IR LED 24EA, Sensor 1EA
Input/Output Connector	Power input, Video output
Electronic Shutter Speed	1/60~1/100,000sec
Power Consumption	3W (Max)
Dimensions	100(Ø) x 101.1(H) mm
Weight	Approx. 366g

Dimensions

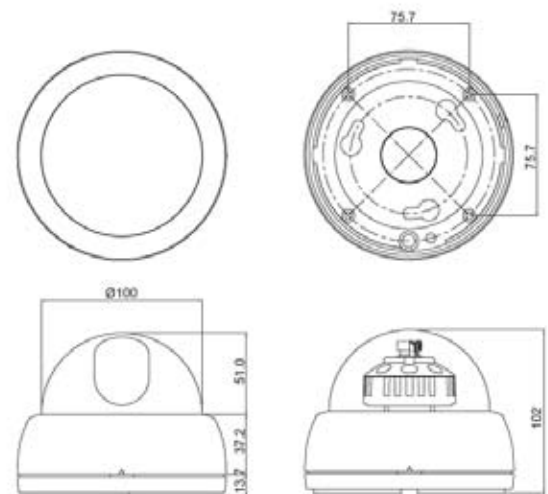

ClearVision and the ClearVision Logo are registered trademarks of ClearVision, Inc.
 Sony is a registered trademark of Sony Corporation
 Product specifications and availability are subject to change without notice.
 ©Copyright 2008, ClearVision, Inc. All rights reserved.