

IR Dome Camera

Features


- 1/3" SONY Super HAD CCD
- 380 TVL Resolution
- 3.8mm Lens
- 0 Lux Minimum Illumination
- 12VDC Operation



Specifications

Model	IPC-DC380IRVP
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.734kHz
Scanning Frequency (V)	59.94Hz
Image Sensor	1/3" SONY Super HAD CCD
Sync System	Internal
Total Pixels Number	537 (H) x 505 (V) 270K
Effective Pixels Number	510 (H) x 492 (V) 250K
Horizontal Resolution	380 TV Lines
Video Output Level	1.0 Vp-p (75 Ohm, Composite)
S/N Ratio	More than 48dB
Lens	Fixed Lens f=3.8mm
Iris Control	DC Iris / Video Iris / Manual Iris
Min. Illumination	Day (0.1 Lux), Night (0.00 Lux, IR LED On)
IR LED and Sensor	24 Ea. IR LED, 1 Sensor
IR LED Visible Range	Max 15m
Shutter Speed	1/60 ~ 1/10,000 sec
Supplied Voltage	12VDC

Dimensions

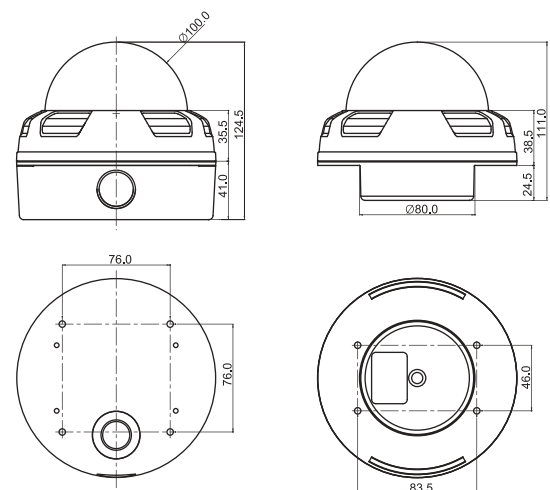

ClearVision and the ClearVision Logo are registered trademarks of ClearVision, Inc.
 Sony is a registered trademark of Sony Corporation
 Product specifications and availability are subject to change without notice.
 ©Copyright 2008, ClearVision, Inc. All rights reserved.