

IR Dome Camera

Features


- 1/3" SONY Super HAD CCD
- 600 TVL Resolution
- 3.8mm Lens
- 0 Lux Minimum Illumination
- 12VDC Operation



Specifications

Model	CD-DC600IR
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency(H)	15.734kHz
Scanning Frequency(V)	59.94Hz
Image Sensor	1/3" Super HAD CCD
Sync. System	Internal
Total Pixels Number	811(H) x 508(V) 410K
Effective Pixels Number	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines
Video Output Level	1.0Vp-p (75 Ohms, composite)
S/N Ratio	More than 48dB(AGC Off)
Lens	Fixed Lens (3.8mm)
Min. Illumination	0.00lx (IR LED on)
White Balance	Auto
AGC	On/Off
BLC	On/Off
OSD Menu	On/Off
Mirror Function	On/Off
Privacy Zone	4 Area
Motion detection	On/Off
IR LED & Sensor	850nm / 30° IR LED 24EA, Sensor 1EA
IR LED Lighting Distance	15m
Electronic Shutter Speed	1/60~1/100,000sec
Power Voltage	12VDC
Power Consumption	Max. 370mA
Dimensions	100(Ø) x 102(H) mm
Weight (Net)	Approx. 366

Dimensions

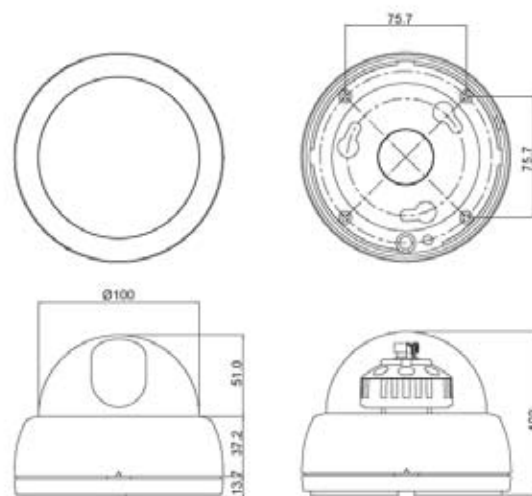

ClearVision and the ClearVision Logo are registered trademarks of ClearVision, Inc.
 Sony is a registered trademark of Sony Corporation
 Product specifications and availability are subject to change without notice.
 ©Copyright 2008, ClearVision, Inc. All rights reserved.